



# MQ-L500 User's Manual

## Digital Voice Recorder & Cellphone Portable Charger



### Caution in use


Please be sure to read user's manual before use and use product safely and properly.

**Warning - Do not leave product alone in high temperature more than 40 degrees like a car, or that can be the cause of explosion and fire.**


- \* The pictures in user's manual can be different from the real thing and contents can be changed without prior notice to improve performance.
- \* To use product with other devices, check the compatibility each other first.
- \* We are not responsible for the loss of recordings caused by misuse, after-sale service, others.
- \* We are not responsible for the damage caused by the use of product and for the third party's claim for compensation.
- \* Decomposition, remodeling, impact or usage at low temperature, high temperature, humid place can be the cause of breakdown.

### Name of each part

- ㉑Charging terminal for external device
- ㉒Charging/USB terminal for body
- ㉓Battery button
- ㉔Battery remains LED
- ㉕Recording LED
- ㉖Microphone
- ㉗Recording switch

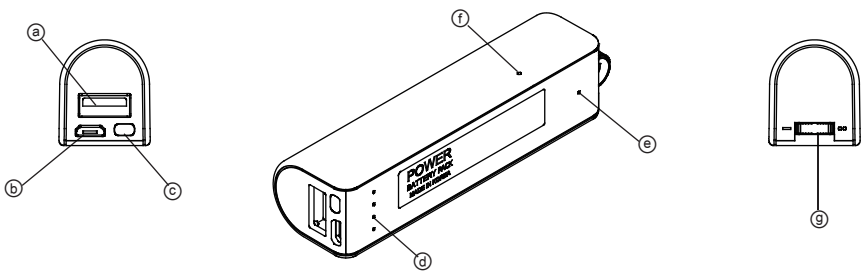


### Composition

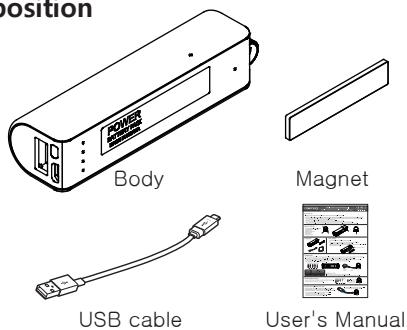

### Using magnet

You can install product easily by using magnet.

- \* Attach magnet on the groove of product and put product near steel desk, steel electronic appliances, etc. and product is attached.
- \* When you detach product in separating, magnet can be attached to the installation place. Detach magnet and keep it.



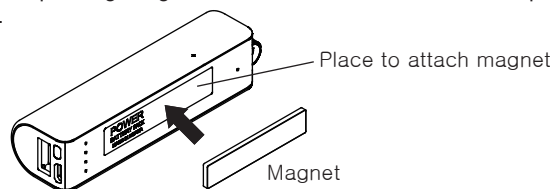


### Charging body

After connectng USB cable to body charging terminal(㉒), charge it by connecting to the charging adaptor(option) or PC USB port.

- \* In charging by connecting product to PC with USB cable, in case of low power supply current, charging speed can be slow.
- \* During charging, product and charger can be a little hot. That is normal phenomenon and does not influence the life or function of product.
- \* During charging, like below picture, blinking LED is changed to lighting in order according to battery capacity. When charging is completed, all LED are turned on.

<Battery status during charging>

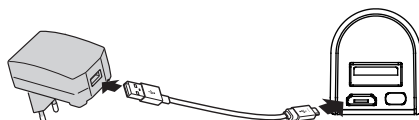

Charging adaptor      USB cable      Body

Battery type	Li-ion
Battery capacity	3,000mAh(3.7V)
Power input	DC 5V, 1A
Power output	DC 5V, 2A(Max)
Body charging time	AC/DC adaptor - about 3 hours, PC - about 5 hours

\*Charging time condition :


- AC/DC adaptor is data measured by using 5V/2A product.
- PC is data measured by connecting USB cable to the USB port at the rear of PC.

### Checking battery remains

You can check battery remains by pressing batteryr button(㉓).

- \* Battery remains is indicated for 20 seconds.
- \* If the battery remains indication is , charge the battery

<Battery remains indication>



Charge the battery . . 30% . . 60% . . 100%


- Lights-out(turned off)
- ✱ Blinking(flickering)
- Lighting(turned on)



### Charging external device from body

After connecting USB cable to charging terminal for external device, connect the other end to the connector of external device. Press battery button(㉓), and the charging of external device starts.

- \* When charging is completed, power is turned off automatically.
- \* This product is used as an auxiliary battery and the batteries of some devices can not be charged completely.
- \* During recording, it can not charge external device.

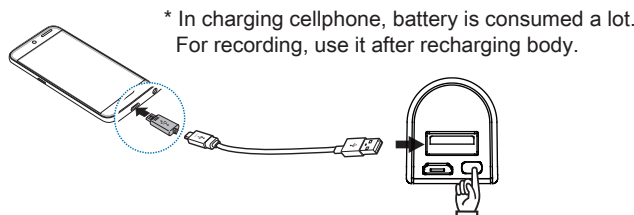

# MQ-L500 User's Manual

## Digital Voice Recorder & Cellphone Portable Charger

MADE IN KOREA

### Connecting it to PC

After connecting USB cable to the USB terminal(㉒) of body, connect the other end to the USB port of PC.

- \* To use it on PC, keep recording switch(㉗) in the state of stop.
- \* You can use the functions of "copy, delete, playback, format" on PC in the same way as general USB memory.
- \* When it is connected to PC, "MemoQ(removable disk)" is created, double-click it, and there is the folder of VOICE.




- \* In separating product from PC, perform "safe removal of hardware" to prevent data damage.

### Date & time setup

- \* After connecting USB cable to USB terminal(㉒) of body, connect the other end to the USB port of PC.
- \* Double-click "MEMOQ(removable disk), and there is "Time Setup".
- \* Double-click "Time Setup", the window of "date\_time.cfg creator" is opened on wallpaper. Click the button of "Start".
- \* After checking the creation of date\_time.cfg file, separate product from PC, and recording LED(㉕) blinks rapidly and time setup is completed.

- \*\*Caution1 : date and time configured in PC is set up automatically.
- \*\*Caution2 : When battery is discharged, date is initialized. Perform time setup again before recording.
- \*\*Caution3 : Copy the program of Time Setup into PC and keep it. In case that product is formatted or program is deleted, you can copy the program into product and use it.




### Recording(continuous recording / super voice operated recording system / recording by external power)

When recording starts, recording LED(㉕) is turned on for about 5 seconds, and it is not turned on in case of the shortage of memory storage and excess of 9,999 file numbers.

- \* When you turn recording switch(㉗) to the direction of ,continuous recording starts after about 5 seconds. (Recording files are split by 5 hours and are saved.)
- \* When you turn recording switch(㉗) to the direction of , super voice operated recording system(SVOS) starts after about 5 seconds. In case of super voice operated recording system(SVOS), if there is no sound for 1 minute during recording, it saves recording and is converted to standby mode and start recording again automatically when sound is detected.
- \* When you move the groove of recording switch(㉗) to the center, recording stops and current recordings are saved. Recording file is saved in the folder of VOICE as a format of MP3.

\* Recording by using external power :

When you connect product to PC or charging adaptor during recording, you can record for a long time. (refer to "charging body") During recording by using external power, recording LED(㉕) blinks in the interval of 5 seconds and you can record up to the recording time per memory.

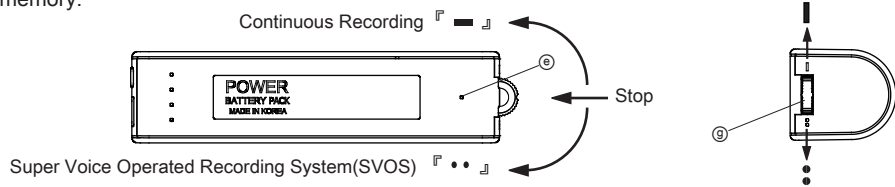

### Formatting


- \* When you format MemoQ(removable disk), all data of product are deleted.

- \*\* Caution : It supports the format type of FAT32 only. If you change to other type, product does not work properly.
- \*\* Caution : Data deleted once can not be restored.

### Specification

USB Memory	8GB	16GB	32GB
Recording time	about 288 hrs/	about 576 hrs/	about 1152 hrs
Days of battery use	about 14 days(2weeks) in continuous recording about 150 days in SVOS standby recording [sound detection level : about 60dB(A)]		
No of recording file	9,999 files		
Dimension,Weight	93(W) x 27(H) x 23(D) mm, 75g		
Power	Li-ion, 3.7V, 3,000mAh		
Operating environment	temperature:0~ 40°C, humidity:20~80%		
Accessories	USB cable, magnet, user's manual		

In SVOS, recordable day after standby time of no recording

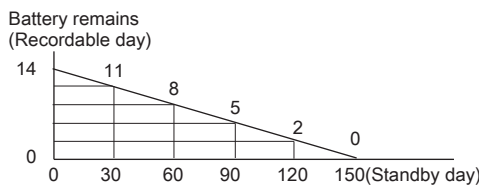

### Warranty Card

Product Name		Voice Recorder & Portable Charger
Model No.		MQ-L500
Purchasing Date		
Purchasing Place		
Tel		
Others		
Warranty Period		1 year from purchasing date
Customer	Name	
	Address	
	Tel.	

- Paid service
- Defect caused by careless use.
  - Defect caused by user's internal modification.
  - Defect caused by natural disasters like fire, salt damage, flood, earthquake, etc.
  - Defect out of warranty period.