

StealthTronic - Ultralife Wi-Fi PIR



UltraLife Wi-Fi series is especially practical for long term surveillance devices. This module is equipped with low PIR sensor and **Wi-Fi functionality** that allows you to monitor places with low activity movements for a long period of time.

The module is placed manually to the covert PIR module, which makes it virtually unrecognizable from the real PIR sensor.


QUICK SETUP

- 1. Download application "Yi Eye"
- 2. Connect the device with supplied USB
- 3. Connect your phone local Wi-Fi
- 4. Open Yi Eye
- 5. Click on the + sign
 - If the device has blinking RED diode → Click on RED LED IS BLINKING
- 6. Type in your Wi-Fi password and press "Connect to Wi-Fi" after that you choose: **Password for you camera**
- 7. Click on Start Smart Config
- 8. Your device is now being connected to internet. Click SAVE

Package contains



Parts description

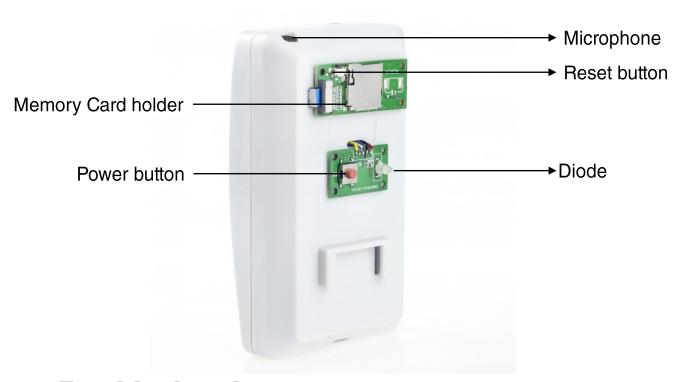

Troubleshooting

Connecting to the application

If the red diode is not blinking, charge the unit again and restart the device by

- 1. holding power button for 3 seconds
- 2. hen hold RESET button for 20 seconds

STATS

Working modes

- · recording modes for motion detection
- online preview via mobile phone
- · recording in an infinite loop

Camera 1.3Mpix CMOS sensor

- angle of view of 70 $^{\circ}$
- 3.6mm lens
- light sensitivity 1 Lux

Recordings resolution 1280x720px

- · .AVI video format
- adjustable recording length 10-60
- · recordings of dates and times
- · the ability to remotely play and export records
- average 360MB / 1h of recording

Microphone

• sensitivity up to 3 - 5 meters

Battery

- 3.7V 5500mAh Li-Pol
- up to 180 days in PIR mode
- · lasts about 20 hours of continuous recording
- · lasting 1h daily for approximately 19 days

Consumption

- Consumptio1-2mA PIR mode
- 250mA Recording
- 350mA online transmission

Power supply

- DC 5V 1A
- External memory
 - micro SD up to 32GB
 - up to 88 hours of recording
- Dimensions 107 x 58 x 45mm